VESTA DIGITAL CATALOG 2025 EDITION

Air pressure, our pleasure.











Since 1984, pneumatic solutions for a range of different industries in over 60 markets worldwide























ALWAYS COMMITTED TO QUALITY

UNI EN ISO 9001

compliant since 1996 100% of products tested







THE RANGE

CLICK ON PRODUCTS

page 6

CYLINDERS

Pneumatic actuators & grippers

VALVES

Pneumatic & solenoid valves

AIR TREATMENT

FRL units & precision regulators

FITTINGS

Fittings, flow regulators, silencers

page 19

page 31

page 38










Over 42 million cylinders produced since 1984

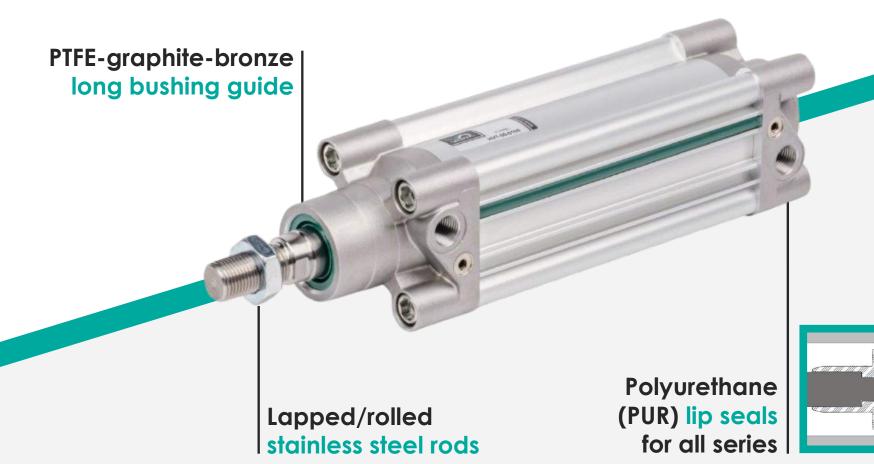

CYLINDERS

ISO STANDARD CYLINDERS

STAINLESS STEEL CYLINDERS

page 16





ATEX CYLINDERS (Ex)



STAINLESS STEEL CYLINDERS



page 8



GUIDED NON-ROTATION

page 12

ROTARY AND SLIDES

page 13

LINEAR LONG STROKE

page 14

PNEUMATIC GRIPPERS

page 15












ISO 6432 ROUND CYLINDERS









DLM/ALM*

Ø08, 10, 12, 16, 20, 25

ISO 6432 magnetic cylinders *stainless steel version DLX/ALX: page 16



DLT/ALT

ø32, 40, 50, 63

Round magnetic cylinders

CLICK ON 1 PRODUCTS 1





ISO 15552 STANDARD CYLINDERS







stainless steel rods

HVT*

ø32, 40, 50, 63, 80, 100, 125

ISO 15552 magnetic cylinders

*stainless steel version HVX: page 16

FKM seals available for all sizes



HVJ

ø160, 200, 250, 320, (300, 400)

ISO 15552 big-size magnetic cylinders






ISO 21287 & COMPACT CYLINDERS










NSK*

ø12, 16, 20, 25, 32, 40, 50, 63, 80, 100, 125

ISO 21287 & UNITOP compact cylinders *stainless steel version SHX: page 16





SHJ

ø160, 200

Big size compact magnetic cylinders



SHQ

ø12, 16, 20, 25, 32, 40, 50, 63, 80, 100, 125

Short-stroke magnetic cylinders









ISO CYLINDERS CONVERSION CHART





		FESTO	SMC	PARKER	NORGREN	ASCO
ISO 6432	DLM ALM	DSNU (double act.) ESNU (single act.)	C85	P1A	RM8000	Series 435
ISO 15552	HVT HVJ	DSBG DSBC DSBF	CP95 CP96	P1D (discontinued)	PRA802000	Series 450 Series 453
	SHC	ADN (double act.) EDN (single act.) ADVU (UNITOP)	C55	P1P	RA192000	Series 499
	21287 OMPACT SHQ		CDQ		RM92000	





GUIDED NON-ROTATION SOLUTIONS



Ball-bearing guide version available



GLH*

ø20, 25, 32, 40, 50, 63, 80, 100

ISO 15552/6432 compliant linear control units H *stainless steel version GLX: page 16






SHG

ø12, 16, 20, 25, 32, 40, 50, 63, 80, 100

Compact guide non-rotation cylinders



2/3/4-tandem version available



NCV

ø63

Flat non-rotation pneumatic cylinders







ROTARY ACTUATORS AND SLIDES



RHV

ø12, 16, 20, 25, 32, 40, 50, 63

Rotary actuators (male/female, 90°/180°/360°)

HPS

Pneumatic dual holed-rod slides

CLICK ON PRODUCTS





LINEAR ACTUATORS





RLF

ø25, 32, 40, 50, 63, 80, 100

Long stroke rodless cylinders

TLS

ø25, 32, 40, 50, 63

Telescopic cylinders (2, 3 or more stages)

EHV

ø40, 50, 63, 80

ISO15552 electrical actuators

CLICK ON T









PNEUMATIC GRIPPERS





ø10, 12, 16, 20, 25, 32

Angular 30° grippers (single/double acting)





NGP

ø10, 16, 20, 25

Parallel grippers (single/double acting)





NGT

ø12, 16, 20, 25

180° grippers





STAINLESS STEEL CYLINDERS





DLX/ALX

ø10, 12, 16, 20, 25

ISO 6432 cylinders (with adj. cushion) in AISI304/316

HVX

ø32, 40, 50, 63, 80, 100, 125 (160, 200)

ISO 15552 cylinders in AISI 316

SHX

ø16, 20, 25, 32, 40, 50, 63, 80, 100


ISO 21287 compact cylinders in AISI 316

CLICK ON 1 16





STAINLESS STEEL CYLINDERS





GLX

Inspectionable heads

ø25, 32, 40, 50, 63, 80, 100

ISO 15552/6432 linear H guides in AISI304/316

FCX


ø32, 40, 50, 63

AISI 304 cylinders for the food industry

CLICK ON 17 PRODUCTS L



Over 35 million valves produced since 1989

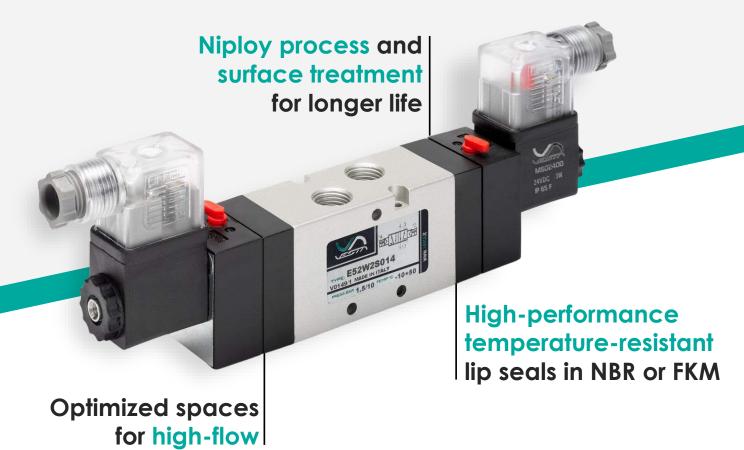



VALVES







VALVES & NAMUR FOR EXTREME ENVIRONMENT

page 20

VALVES & NAMUR FOR STANDARD ENVIRONM.

page 22



page 23







MULTIPOLE/NETWORK VALVE ISLANDS

page 24



MINI SIZE VALVES

page 25

3/2 DIRECT OPERATORS

page 26



HIGH-FLOW 3/2 VALVES

page 27

MECHANICAL & MANUAL VALVES

page 28








VALVES FOR EXTREME ENVIRONMENT











E/NM Series

22mm coil G1/8", 1/4", 1/2", NAMUR

ATEX II 3GD dust resistant lip-seals valves











ATEX II 2 GD VALVES & SOLENOID VALVES



High & low temp. versions available

XE/XNM/XSVE

22mm coil ATEX II 2GD G 1/4", G 1/2", NAMUR, ISO 1

ATEX II 2GD full metal-body lip-seals valves











VALVES FOR STANDARD ENVIRONMENT






LNE/LNM Series

22mm coil G1/8", 1/4", 3/8", 1/2", NAMUR

Light die-cast body lip-seals valves
















ISO 5599 VALVES & SOLENOID VALVES



SVP/SVE Series

22/30mm coil SIZE ISO 1, ISO 2, ISO 3, ISO 4

Die-cast body lip-seals ISO 5599 valves









MULTIPOLE & FIELDBUS VALVE MANIFOLD





Operator 10mm IN: G1/4" OUT: tube Ø 6, Ø 8

Self-configuration modular plug-in valve terminal

EWJ NETLOGIC

PROFINET, ETHERNET IP, ETHERCAT

Industrial network protocol valve terminal

Innovative system for coils configuration

Switching Time 15ms











MINI SOLENOID VALVES

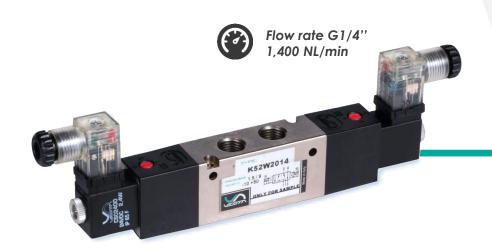

K Series

17mm coil G1/8", 1/4", 1/2"

High-flow quick-exchange mini valves





Y Series

10mm coil M5 ports

Mini M5 port valves manifold















DIRECT ACTING 3/2 OPERATORS










CWJ-10

3/2 micro operators 10mm (manifold available)





QBE

22mm coil - G1/8"

10mm

3/2 direct acting solenoid valves

PRODUCTS 1







HIGH-FLOW 3/2 POPPET VALVES



High & low temp. versions available




PV32

22/30mm coil G1/8", 1/4", 3/8", 1/2", 3/4", 1", 1½", 2"

3/2 high-flow poppet valves for air & vacuum

Flow rate 6.000 to 60.000 NL/min

CLICK ON PRODUCTS 1



Vacuum with servo-vacuum available







MANUAL VALVES





VCML

G1/8", 1/4", 1/2"

Manual lever valves (AISI 304 lever option)

Available with pneumatic return





VCMT

G1/8", 1/4"

Manual button valves

VFP

G1/4"

Foot pedal valves

CLICK ON PRODUCTS 1





MECHANICAL VALVES





VCMS G1/8", 1/4"


Cam actuated mechanical valves



VCLL

G1/8"

Lateral roller-lever mechanical valves





VCLR G1/8", 1/4"

Roller-lever valves (AISI 304 operator option)

CLICK ON T






MANUAL & MECHANICAL MICRO VALVES





Push-in Tube Ø4, M5

Manual button/switch micro valves





MMA

Push-in Tube Ø4, M5

Cam actuated mechanical micro valves



MMR/MMS

Push-in Tube Ø4, M5

Roller lever mechanical micro valves

CLICK ON PRODUCTS 1





PNEUMATIC LOGIC ELEMENTS






AND/OR/YES/NOT

Push-in Tube Ø4

Logic elements for pneumatic control

Two-hand safety valve





SBI Push-in Tube Ø4

Two-hand safety valves




AIR TREATMENT UNITS

From 1/8" precision regulation up to 2" high-flow elements

All series with aluminium body for high-resistance



Acetal polymer pistons with NBR lip seals for stable regulation

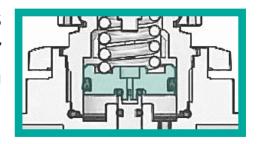

AIR TREATMENT





PRESSURE REGULATORS

page 34



MODULAR LINES (FRL)

page 35



HIGH-FLOW, HIGH-PRESSURE & BOOSTERS

page 37



HIGH-PRECISION REGULATORS

page 38



PROPORTIONAL VALVES

page 38








PRESSURE REGULATORS



Regulators available with backflow option





TU-R2

M5, G1/8", 1/4"

Pressure microregulators (with backflow option)

TU-R SIZE 3/4/5

G1/4', 3/8", 1/2", 3/4", 1"

Pressure regulators (with backflow option)

TU-OX (on request)

G1/4"

Regulators for oxygen (NSF materials)

CLICK ON 4

High & low temp.

versions available



















FRL UNITS - MODULAR LINES





TU-FRL SIZE 2

R = Regulator, **FR** = Filter-regulator, **FRL** = FRL Unit \mathbf{F} = Filter, \mathbf{L} = Lubricator, \mathbf{VM} = 3/2 on-off valve **VS** = Slow start + shut-off valve

TU-FRL SIZE 3

G1/4", 3/8", 1/2"

G1/4'

R = Regulator, **FR** = Filter-regulator, **FRL** = FRL Unit \mathbf{F} = Filter, \mathbf{L} = Lubricator, \mathbf{VM} = 3/2 on-off valve **VS** = Slow start + shut-off valve, **MMF** = Micro-mist filter



















FRL UNITS - MODULAR LINES







TU-FRL SIZE 4

R = Regulator, **FR** = Filter-regulator, **FRL** = FRL Unit \mathbf{F} = Filter, \mathbf{L} = Lubricator, \mathbf{VM} = 3/2 on-off valve **VS** = Slow start + shut-off valve

TU-FRL SIZE 5

G3/4", 1"

G1/2"

R = Regulator, **FR** = Filter-regulator, **FRL** = FRL Unit \mathbf{F} = Filter, \mathbf{L} = Lubricator, \mathbf{VM} = 3/2 on-off valve **VS** = Slow start + shut-off valve

TU-SF SIZE 4/5

G1/2", 1"

Special filters and water separators





















HIGH-FLOW, HIGH-PRESSURE & BOOSTERS





0-15 bar regulation, 20 bar resistance



High & low temp. versions available



G1/2"

High-pressure air treatment units (0-15 bar) **HHT** version (+120°C), **LLT** version (-40°C)

TU-F, R, L SIZE 6/7

G1 ½", 2"

High-flow filters & regulators



PBR SERIES

ø40, 63, 100

Pressure boosters (1:2, 1:3, 1:4)

CLICK ON 1 PRODUCTS 1









HIGH-PRECISION PRESSURE REGULATION



0.2% F.S. precision





High flow rates: G1/2" 5,000 NL/min G1" 14,200 NL/min





Output: 1-5V, 4-20mA & PNP



HPR SERIES

G1/8", 1/4", 1/2"

High-precision manual pressure regulators

DPV SERIES

G1/4", 1/2", 1"

Proportional valves with electric control

DPS SERIES

G1/8"

Digital pressure switches (positive and vacuum)

DFM SERIES

G1/4", 1/2", 3/4"

Digital flow meters (100 to 2,000 NL/min)





CLICK ON 4



FITTINGS

SANGE MAP



QUICK PUSH-IN FITTINGS & MINI FITTINGS

page 40

BRASS FITTINGS

page 40

STAINLESS STEEL FITTINGS

page 40







CONTROL VALVES

page 40



page 41

SILENCERS

page 41

FITTINGS WITH VACUUM GENERATOR

page 41













FLOW REGULATORS, SILENCERS, VACUUM











QF

G1/8", 1/4", 3/8", 1/2"

Quick push-in fittings

QM

M3, M5, M6

Quick push-in mini fittings

QB

G1/8", 1/4", 3/8", 1/2"

Brass push-in fittings

QX

G1/8", 1/4", 3/8", 1/2"

Stainless steel push-in fittings

QV

G1/8", 1/4", 3/8", 1/2"

Control valves









FLOW REGULATORS, SILENCERS, VACUUM



Precision control high flow capacity



CLICK ON 1 PRODUCTS L





Vacuum pressure up to -0.90 bar



G1/8", 1/4", 3/8", 1/2"

Precision speed controllers

QR

G1/8", 1/4", 3/8", 1/2"

Push-in speed controllers

QS

G1/8", 1/4", 3/8", 1/2"

Silencers & exhaust control silencers

VQ

G1/8"

Fittings with vacuum generators

















Custom pneumatic cylinders and valves for hard environments, with special functions or for different fluids.



Ask us for more: info@vesta.it

























Didactic panel pneumatic or electronic







Vesta Automation S.r.l.

Via Martiri di Belfiore 69/A

45100 Rovigo – Italy



+39 0425 474838













